

The Bleak Estate Assembly Instructions - Page 1.



The Bleak Estate Assembly Instructions - Page 2.

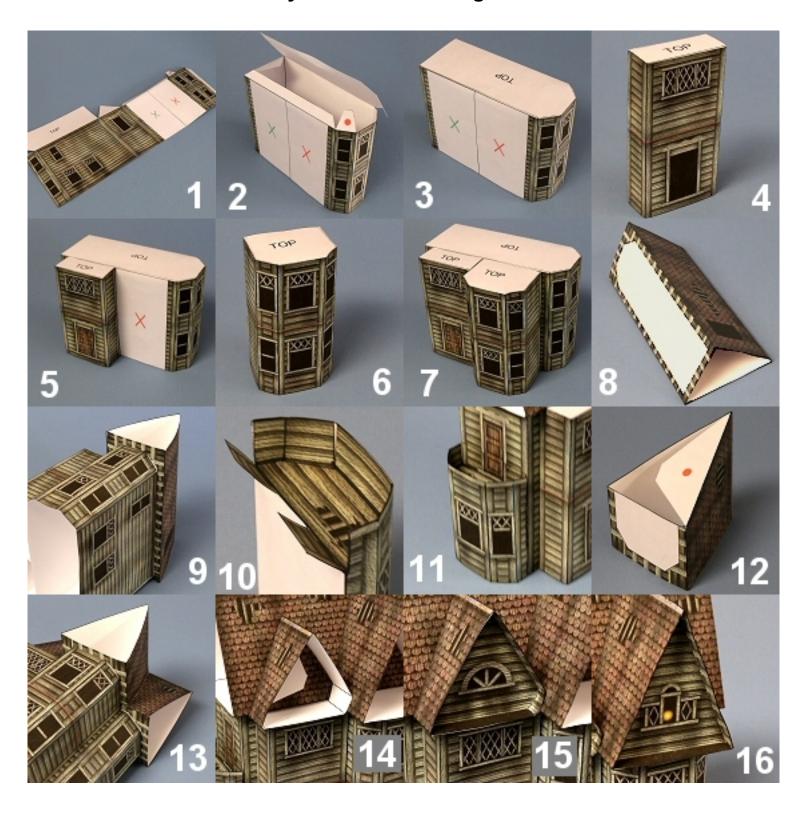

The Bleak Estate Assembly Instructions - Page 3.

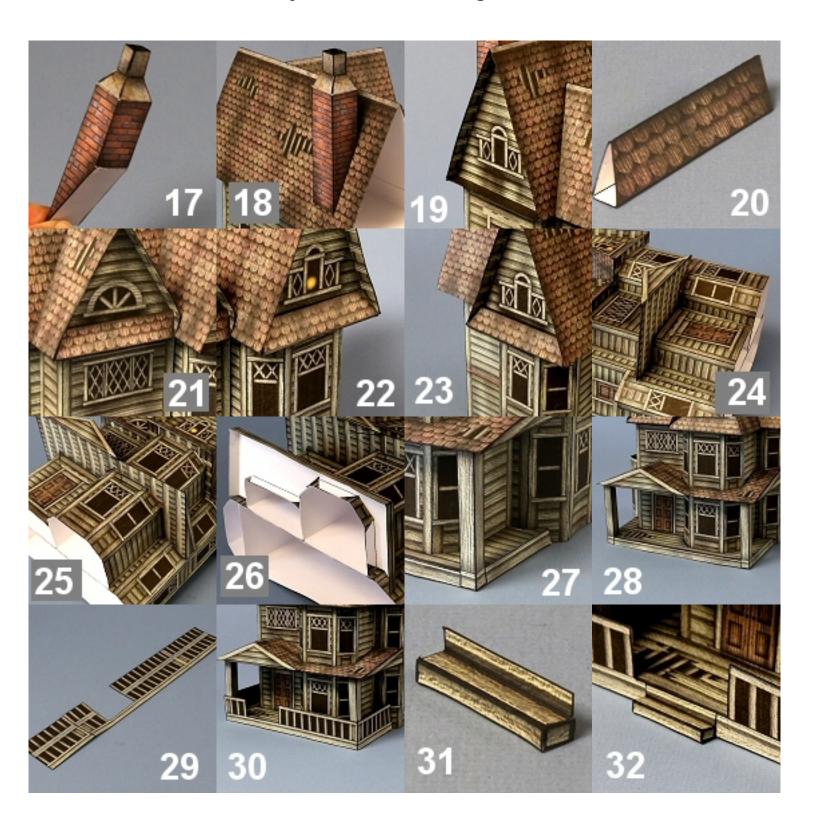

WHAT YOU'LL NEED: Scissors, glue (or a glue stick), a ruler or other straight edge, and a black marker.

FOLDING TIP: It's helpful to 'score' the fold lines before folding. You can use an old ink pen, a knitting needle, the end of a paper clip, or any metal object that will crease the paper without tearing it. (I use a pointy little tool from a manicure kit.) Scoring will help you fold much more quickly and precisely.

BUILDING TIP: This model will look much nicer if you use a black marker to darken the white paper edges of each piece (by laying the marker sideways on the paper edge or by turning the piece face down and tracing around it with the marker). You should also use a black marker to remove all the colored fold lines (after scoring).

ASSEMBLY: Begin by cutting out HOUSE A on Parts Page 1. Fold all four gray tabs DOWNWARD. Then fold both windowed panels DOWNWARD, folding on the blue lines.

Cut out HOUSE B on Parts Page 2. Fold the two dark gray tabs DOWNWARD. Fold the top panel and the remaining gray tab DOWNWARD. Fold both outer wall panels DOWNWARD, folding on the blue lines.

Glue the HOUSE A tab with a green dot to the unprinted side of the HOUSE B panel with a doorway, as shown in Figure 1. Then glue the HOUSE A tab with a yellow dot to the unprinted side of the HOUSE B panel with two small windows, as shown in Figure 2.

Glue the small dark gray tab to the unprinted side of the top panel. Glue the larger dark gray tab to the unprinted side of the adjacent wall panel. Glue the tab with a red dot to the unprinted side of the top panel, and then do the same for the long gray tab and the large triangular tab. The house should now resemble Figure 3.

If you want the upstairs doorway to have a door, cut out the UPPER DOOR on Parts Page 1 and glue it over the open doorway.

Now cut out FRONT A on Parts Page 3. Fold all four gray tabs DOWNWARD. Fold the top panel and the gray panel with an X both DOWNWARD. Then fold both outer wall panels DOWNWARD, folding on the blue lines.

Glue the tab with a green dot to the unprinted side of the opposite wall panel. Then glue the two tabs with yellow dots to the unprinted side of the adjacent panels, and glue the tab with a red dot to the unprinted side of the top panel. You can reach inside the piece with scissors or a ruler so there's something to press against when gluing. The finished piece should resemble Figure 4.

If you want the front door to be closed, cut out the FRONT DOOR on Parts Page 3 and glue it over the open front doorway.

The Bleak Estate Assembly Instructions - Page 4.

Glue the FRONT A panel with a green X to the HOUSE panel with a green X, as shown in Figure 5.

Cut out FRONT B on Parts Page 4. Fold the two small dark gray tabs DOWNWARD. Then fold the remaining four tabs DOWNWARD. Fold the top panel and the large gray panel with a red X both DOWNWARD. Then fold DOWNWARD between all five wall panels, folding on the blue lines.

Glue the tab with a green dot to the unprinted side of the opposite panel (with the red X). Then glue the two dark gray tabs to the unprinted side of the top panel. Glue the two tabs with yellow dots to the unprinted side of their adjacent panels and then glue the tab with a red dot to the unprinted side of the top panel. The piece should now resemble Figure 6.

Glue the FRONT B panel with the red X to the HOUSE panel with the red X, as shown in Figure 7.

Cut out the ROOF piece on Parts Page 5. Fold DOWNWARD between the two sides, folding along the black center line. Then cut out the ROOF BOTTOM on Parts Page 6 and fold both tabs DOWNWARD. Glue the ROOF BOTTOM tab with a green dot to the unprinted side of the ROOF panel with a black rectangle. Then glue the ROOF BOTTOM tab with a red dot to the unprinted side of the remaining roof panel, forming a triangular roof as shown in Figure 8.

Glue the ROOF to the top of the HOUSE as shown in Figure 9. (The black rectangle on the roof should face the back of the house.)

Next, cut out the SIDE ROOM on Parts Page 6. Fold the tab with a green dot DOWNWARD and fold the large gray panel DOWNWARD. Then fold DOWNWARD between the five wall panels, folding on the blue lines. Glue the tab with a green dot to the unprinted side of the opposite gray panel.

Cut out the SIDE DECK on Parts Page 11. Fold all six side panels UPWARD, folding on the green lines. Glue the five smaller SIDE DECK side panels to the inside of the SIDE ROOM walls, as shown in Figure 10.

Glue the SIDE ROOM to the side of the house as shown in Figure 11.

Cut out the PEAK B ROOF on Parts Page 7. Fold the tab with a red dot DOWNWARD and then fold DOWNWARD between the two sides, folding along the black center line.

Then cut out the PEAK B ROOF BOTTOM on Parts Page 7. Fold both tabs with green dots DOWNWARD. Glue the tabs with green dots to the unprinted sides of the PEAK B ROOF as shown in Figure 12.

Glue the PEAK B ROOF to the top of the FRONT B piece and glue the tab with a red dot to the main roof, as shown in Figure 13.

Now cut out PEAK A ROOF on Parts Page 8. Fold the tab with a green dot and the tab with a red dot both DOWNWARD. Fold the end panel (with rafters and a gray area) DOWNWARD. Fold the panel with two dots DOWNWARD and then fold DOWNWARD between the two shingled panels, folding along the black center line.

Glue the tab with a green dot to the unprinted side of the opposite panel. Then glue the PEAK A ROOF to the top of the FRONT A piece, glue the panel with two dots to the PEAK B ROOF, and glue the tab with a red dot to the main roof, as shown in Figure 14.

Cut out PEAK A on Parts Page 9. Fold all four outer panels UPWARD. Carefully position PEAK A inside the PEAK A ROOF piece, as shown in Figure 15, and glue the four outer PEAK A panels to the PEAK A ROOF.

Cut out PEAK B on Parts Page 9. Fold all three outer panels UPWARD. If you want to have a light in the window, cut out the LIT WINDOW on Parts Page 9 and glue it directly over the dark window on PEAK B.

The Bleak Estate Assembly Instructions - Page 5.

Carefully position PEAK B inside the PEAK B ROOF piece, as shown in Figure 16, and glue the three outer PEAK B panels to the PEAK B ROOF.

Now cut out the CHIMNEY on Parts Page 9. Fold the three gray tabs (with dots) DOWNWARD. Fold the light gray rectangular panel DOWNWARD and fold DOWNWARD between all four brick panels. Fold the four upper metal panels DOWNWARD and then fold the four triangular metal panels UPWARD.

Use the black marker to darken the unprinted side of all four triangular metal panels. Then glue the tab with a green dot to the unprinted side of the adjacent brick panel. Glue the tab with a yellow dot and the tab with a red dot to the unprinted side of the opposite brick panel.

Cut out the CHIMNEY TOP on Parts Page 9. Fold the gray tab DOWNWARD and then fold DOWNWARD between all four metal panels. Use the black marker to darken the unprinted side of the piece. Glue the gray tab to the back of the opposite metal panel. Then place the CHIMNEY TOP over the triangular metal CHIMNEY panels, as shown in Figure 17, and glue the triangular CHIMNEY panels to the inside of the CHIMNEY TOP.

Glue the gray CHIMNEY panel directly over the black rectangle on the back of the main roof, as shown in Figure 18.

Next, cut out the two SIDE PEAK pieces on Parts Page 10. For each piece, fold the three outer panels UPWARD. Position one SIDE PEAK in each side of the main roof, as shown in Figure 19, and glue the outer SIDE PEAK panels to the main roof.

Cut out the PEAK A INSERT on Parts Page 12. Fold the tab with a green dot DOWNWARD and fold DOWNWARD between all three panels. Glue the tab with the green dot to the unprinted side of the opposite panel. (You can reach inside the piece with a small knife or something similar so there's something to press against when gluing.) The piece should now resemble Figure 20.

Place the PEAK A INSERT into position on the front of PEAK A as shown in Figure 21. Glue the blank gray panel to the black peak panel.

Now cut out the PEAK B INSERT on Parts Page 12. Fold and assemble in the same manner as the PEAK A INSERT. Then Place the PEAK B INSERT in position on the front of PEAK B as shown in Figure 22. Glue the blank gray panel to the black peak panel.

Cut out the two SIDE PEAK INSERT pieces on Parts Page 10. Fold and assemble both pieces in the same manner as the previous inserts. Glue one SIDE PEAK INSERT to each SIDE PEAK, as shown in Figure 23.

Next, cut out PORCH ROOF A on Parts Page 11. Fold the three gray tabs DOWNWARD. Fold the two shingled panels DOWNWARD. Fold the triangular wood panel DOWNWARD, folding on the blue line. Then fold the two wooden tabs UPWARD, folding on the green lines.

Glue the tab with a green dot to the unprinted side of the adjacent shingled panel. Glue the tab with a yellow dot to the unprinted side of the adjacent rafter panel, and then do the same for the tab with a red dot.

Place PORCH ROOF A in position on the house as shown in Figure 24. The rafter panel should line up with the red line on the house. Glue the two wood PORCH ROOF A panels to the FRONT A piece.

Cut out PORCH ROOF B on Parts Page 12. Fold the tab with a green dot DOWNWARD. Then fold the adjacent triangular wooden panel DOWNWARD, folding on the blue line. Fold the shingled panel DOWNWARD and then fold the two wooden tabs UPWARD, folding on the green lines.

The Bleak Estate Assembly Instructions - Page 6.

Glue the tab with a green dot to the unprinted side of the shingled panel. Then place PORCH ROOF B in position on the house as shown in Figure 25. The rafter panel should again line up with the red line. Both the rafter panel and the shingled panel should extend past the edge of PORCH ROOF A. Glue the two wooden PORCH ROOF B tabs to the house. Then glue down the part of the PORCH ROOF B rafter panel that extends over PORCH ROOF A. Finish the porch roof by placing a little glue under the corner of the shingled PORCH ROOF B panel that extends over the edge of PORCH ROOF A, and gently glue the corner to the PORCH A shingled panel.

Cut out the PORCH on Parts Page 12. Fold all five gray tabs DOWNWARD. Fold all three wooden side panels DOWNWARD, folding on the blue lines.

Glue the two small triangular gray tabs to the unprinted side of the adjacent side panels. Then place the PORCH in position on the house as shown in Figure 26. The three tabs with green dots should line up with the bottom edge of the house. Glue the three tabs with green dots to the house.

Cut out POST A on Parts Page 8. Fold the gray tab DOWNWARD and fold DOWNWARD between all four wooden panels, folding on the blue lines. Glue the gray tab to the unprinted side of the opposite panel. Place POST A in position on the left corner of the porch as shown in Figure 27 and glue POST A to the porch.

Cut out POST B on Parts Page 8. Fold and assemble in the same manner as POST A. Place POST B on the right corner of the porch and glue in place. The porch should now resemble Figure 28.

You can now call the porch complete (and continue on to the step and base) or choose to add railing.

For the railing, cut out RAIL A and RAIL B on Parts Page 8. Fold the gray RAIL B tab DOWNWARD and then glue it to the unprinted side of RAIL A as shown in Figure 29. Fold DOWNWARD along the blue line and glue the inside and outside panels together. Fold DOWNWARD on the yellow line and fold DOWNWARD between RAIL A and RAIL B. Wrap the rail around the porch as shown in Figure 30 and glue the inner white area of the rails to the sides of the porch.

Cut out the STEP on Parts Page 8. Fold the two gray tabs and the two end panels DOWNWARD. Fold UPWARD on the green line and DOWNWARD on the blue line. Glue the two gray tabs to the back of the adjacent panel, as shown in Figure 31. Position the STEP on the front of the porch as shown in Figure 32 and glue the upper STEP panel to the porch.

The house is now finished, so it's time to build a nice landscaped base. Cut out the BASE on Parts Page 13. Use scissors or a utility knife to remove the inner white area. Fold all three gray tabs UPWARD.

Cut out the four BASE SIDES on Parts Page 14. Fold the blank gray tabs on all four pieces DOWNWARD. For the two shorter pieces, also fold the tabs with green dots DOWNWARD.

Glue the blank BASE SIDE tabs to the unprinted side of the BASE as shown in Figure 33. Then glue the tabs with green dots to the unprinted side of the adjacent brick panels. The base should now resemble Figure 34.

And now take a deep breath (if you've been holding your breath this whole time) and we'll finish the model. Position the house over the hole in the base and glue the three gray BASE tabs to the inside of the house, gluing first the short tab and then the two longer tabs. The model should now resemble Figure 35.

And that's everything! Congratulations. You're now the proud owner of The Bleak Estate.